

Technical Data

Caractéristiques techniques / Technische Daten

	ER-16A / 10 mm	
R.P.M max	8.000	
KG	7.5 kg	
← ÷■≊	1:1	
KW	3.5 kW	
Nm max	10 Nm	
Rotation	in ≠ out	

Always run wet


Coolant max pressure

Tourner toujours avec arrosage / Nicht ohne kühlmittel fahren




Filtration / Filtration

40 µm



80 bar / 1160 psi

Taper Cône / Kegel	Size Taille / Größe	н	s
DIN 69871 / 2080	40/50	65/80	40
CAT	40/50	65/80	40
MAS-BT	40/50	65/80	40/50
HSK	63/100	65/80	40/50
САРТО	C6/C8	65/80	40/50
KM	63/100	65/80	40/50

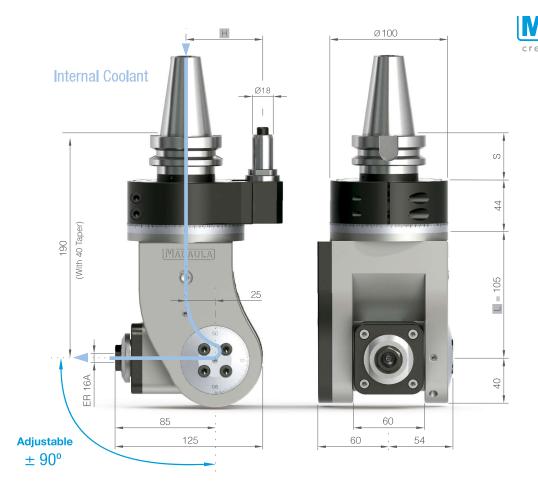

Standard Equipment

Standard / Standard

Optional Equipment Optionel / Option



Bloc d-arrêt / Anschlag-Block

See page 56





Pinces / Spannzangen

See page 57

