




CAR 2IC COOLANT $\pm 90^\circ$ Adjust.

Technical Data

Caractéristiques techniques / Technische Daten


	ER-32A / 20 mm
R.P.M max	4.000
	19 kg
	1:1
KW	6 kW
Nm max	22 Nm
Rotation	in = out
Coolant max pressure	80 bar / 1160 psi

Always run wet


Tourner toujours avec arrosage /
Nicht ohne Kühlmittel fahren

Filtration

Filtration / Filtration 40 μ m



Taper Cône / Kegel	Size Taille / Größe	H	S
DIN 69871 / 2080	50	80	40
CAT	50	80	40
MAS-BT	50	80	50
HSK	80/100	80	40/50
CAPTO	C8	80	50
KM	80/100	80	40/50

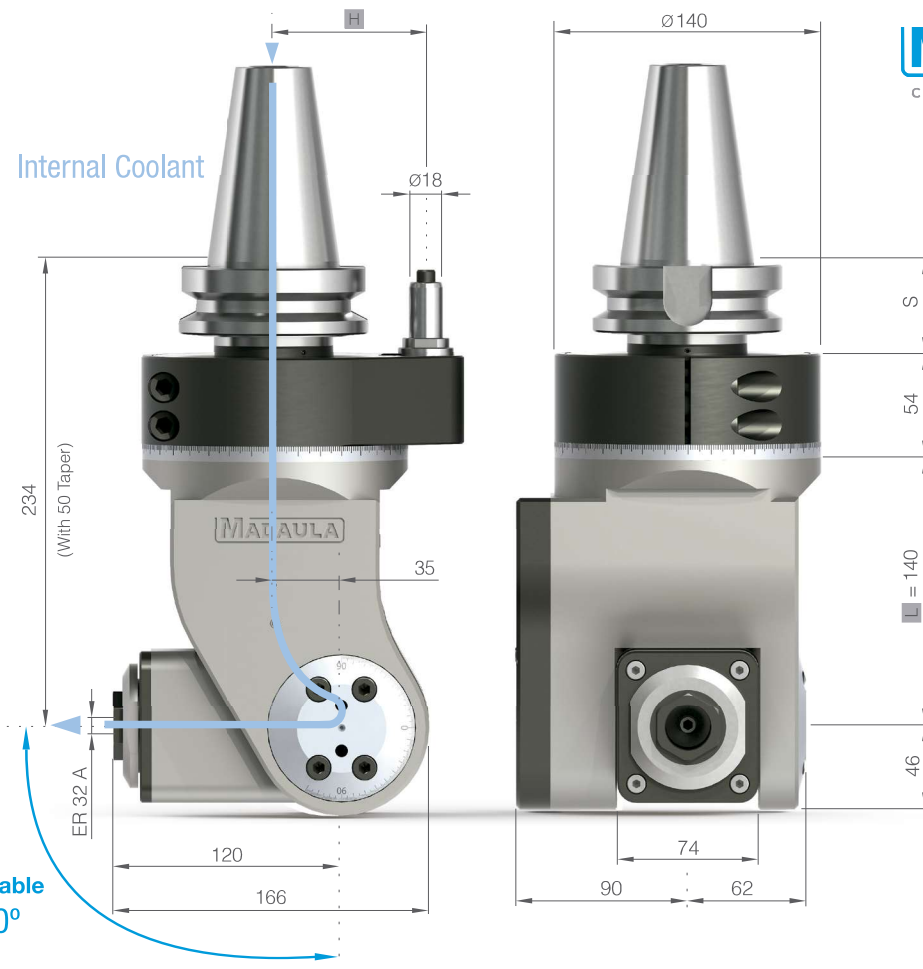

MADAULA
creative solutions

Standard Equipment

Standard / Standard

Optional Equipment

Optionel / Option

Stop Block

Bloc d'arrêt / Anschlag-Block

See page 56 

Collets

Pinces / Spannzangen

See page 57 

